

CONTRAIL[®]

by **TOWMASTER**

MODELS:
C-10BL
C-12BL

The Standard for the Road Ahead!



Some equipment shown may be optional



5" safety lip helps keep equipment in place.



3-ft. beavertail for low loading angle, plus patented Auto-Latch ramp hold-ups are standard.




Stake pockets are included for tying down loads or adding sides.

Description:

The Contrail "BL" or Beavertail-Lip trailer features a 3-ft. beavertail. The lower loading angle helps for loading small equipment. The deck has a 5" safety lip that helps keep equipment on the deck. Dexter Torflex axles give the Contrail C-10BL and C-12BL a predictable, smooth ride. Stake pockets provide a secure place for securing equipment.

Quick Specs:

- 21.5" / 22.5" deck heights (empty)
- 82" between fenders
- 14' or 16' deck
- 3' Beavertail
- 5" Safety Lip
- Electric brakes
- Torflex[®] axles
- 2" nominal white oak deck
- Auto-Latch[®] Ramps

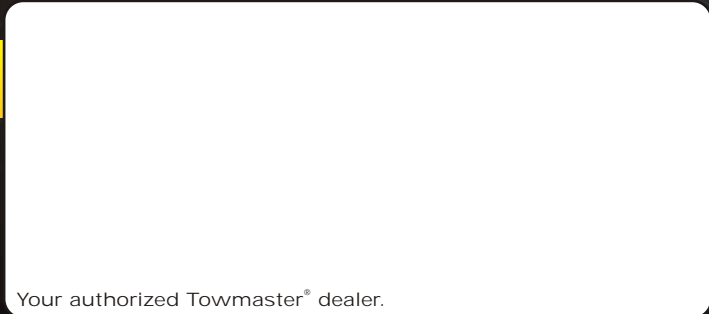


Your authorized Towmaster[®] dealer.

Towmaster, Inc.



800-462-4517

Fax: 320-693-7921

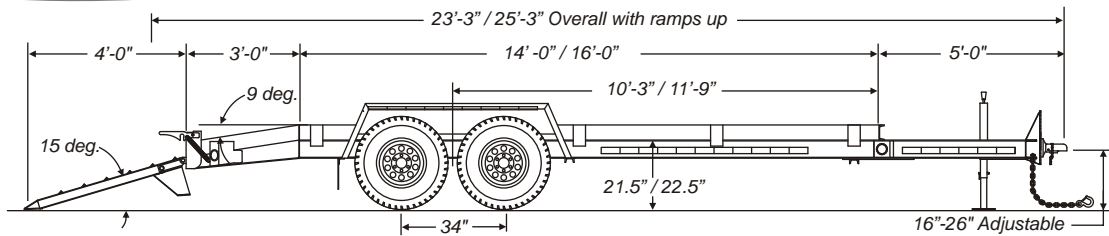

SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS

C-10BL

C-12BL

	C-10BL	C-12BL
Capacity Rating (lbs/kg)	10,000 / 4534	12,000 / 5443
Approx. Weight (14'-0" / 4267mm)(lbs/kg)	3,260 / 1479	3,340 / 1515
Approx. Weight (16'-0" / 4877mm)(lbs/kg)	3,460 / 1569	3,540 / 1606
Deck Height (empty)(lbs/kg)	21.5 / 546	22.5 / 572
Deck Width (ft-in/mm)	8-6 / 2591	8-6 / 2591
Load Width (in/mm)	82 / 2083	82 / 2083

TONGUE

Tongue Length (ft-in/mm)	5-0 / 1524	5-0 / 1524
One-Piece Cold-Formed Perimeter Frame and Tongue	S	S
Adjustable Hitch	S	S
2.5" Pintle Ring or 2-5/16" Ball Coupler	Specify	Specify
3/8" High-Tensile Safety Chain x 40"	Grade 43	Grade 43
Storage Tray	S	S
Storage Tray Lid	O	O
Bolt-on Drop-Leg Parking Jack	7K	7K

FRAME / RAMPS

Main Beam	High-Tensile W6 x 12	High-Tensile W6 x 12
3" Channel Crossmembers	S	S
Crossmembers 18"-24" on-center	S	S
Headboard Height (in/mm)	5 / 127	5 / 127
Deck Lip (in/mm)	5 / 127	5 / 127
Beavertail (ft-in/mm)	3-0 / 914	3-0 / 914
2" Nominal White Oak Wood Deck	S	S
Ladder-Style Ramps/Size (ft-in x in/mm)	4-0x18/1219x470	4-0x18/1219x470
Load Angle (degrees)	15	15
Adjustable Ramps	S	S
Spring-Assist Ramps	O	O
Patented Auto-Latch® Hold-ups	S	S
Tie Downs	Stake Pocket	Stake Pocket
Number of Tie-Downs (Total / Side)	8 / 4	8 / 4

SUSPENSION / TIRES

Dexter Torflex® Rubber-Ride Axles w/5-Year Warranty	S	S
Axle Capacity (each) (lbs / kg)	6,000 / 2722	6,000 / 2722
Hubs	Standard Lube	Standard Lube
Electric Brakes	S	S
Brake Size (in/mm)	12x2 / 305x51	12x2 / 305x51
Battery Break-Away Kit	S	S
Tow Charger	O	O
Wheels (in/mm)	15x6 / 381x152	16x6 / 406x152
Wheel Bolt Pattern	6-bolt	6-bolt
Tires / Load Range Rating	ST225/75R x 15 / D	235/85R x 16 / E
Poly Mud Flaps	S	S

WIRING / FINISH

Weather Resistant Sealed Wiring	S	S
Weather Resistant Shock-Mounted Lights	S	S
Incandescent Type Lights	S	S
6-pole Round or 7-pole RV Electrical Plug	Specify	Specify
Registration Holder	S	S
Rust Inhibiting Primer	S	S
Durable, Rust Resistant Top Coat	S	S
Durable, Die-Cut UV Resistant Vinyl Decals	S	S

Follow local and Federal D.O.T. laws, including Federal Motor Carrier Safety Regulations §392.9, §393.100 and §393.102, and stay within GVWR restrictions.

OPTIONS

Hydraulic surge brakes w/freebacking (Check local D.O.T. laws – may not be available on all models)	Lockable storage tray lid	Bucket stop
Carlisle brake controller	Spring-Assist ramps	Chock block holders
Gooseneck	Pallet fork holders	12K parking jack
E-Z Lube hubs	Additional tie-downs	Spare Tire Mount / Spare Tire & Wheel
	LED lights	

We offers a complete line of trailers in capacities from 2000 lbs. to 120,000 lbs. Listed weights are approximate. Trailer weights can vary due to options installed. All dimensions are approximate. See VIN tag for actual GVWR. Check our website or see your authorized dealer for more information. Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer.

Towmaster, Inc., 61381 US Hwy 12, Litchfield, MN 55355
Toll free: 800-462-4517 phone: 320-693-7900 fax: 320-693-7921
www.towmaster.com
Employee Owned, Employee Pride, U.S.A. Made!
U.S.A. DESIGNED AND BUILT