

# TOWMASTER<sup>®</sup> TRAILERS

MODELS:  
T-14DD  
T-16DD  
T-18DD

The Standard for the Road Ahead!



Some equipment shown may be optional



Solid ramp hold-up bars secure the ramps in transport position.



Spring-assist ramps help lift the ramps off the ground and into transport position.




Optional low-angle 10-degree, 3-ft beavertail available.

## Description:

Towmaster's<sup>®</sup> heavy-duty drop-deck trailers are designed for heavier small to mid-sized equipment. They feature a safety lip around the deck to help keep equipment in place. Dexter<sup>®</sup> Torflex<sup>®</sup> rubber torsion axles are easy pulling and give the T-14DD, T-16DD and T-18DD a smooth ride. Built on a solid one-piece I-beam frame with Jr. I-beam crossmembers and a white oak wood deck and features spring-assist ramps with solid bar hold-ups. Many options available. The Towmaster<sup>®</sup> drop-deck trailer is built to last.

## Quick Specs:

- 24" / 25" / 25" deck height (empty)
- 84" / 82" / 82" between fenders
- 16', 18' or 20' deck
- Electric brakes
- Torflex<sup>®</sup> axles
- 2" nominal white oak deck
- Adjustable hitch
- Solid bar ramp hold-ups
- LED Lights and sealed Wiring

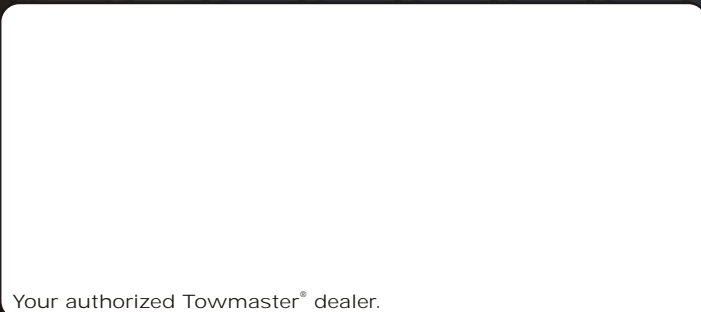


Your authorized Towmaster<sup>®</sup> dealer.

Towmaster, Inc.



800-462-4517

Fax: 320-693-7921

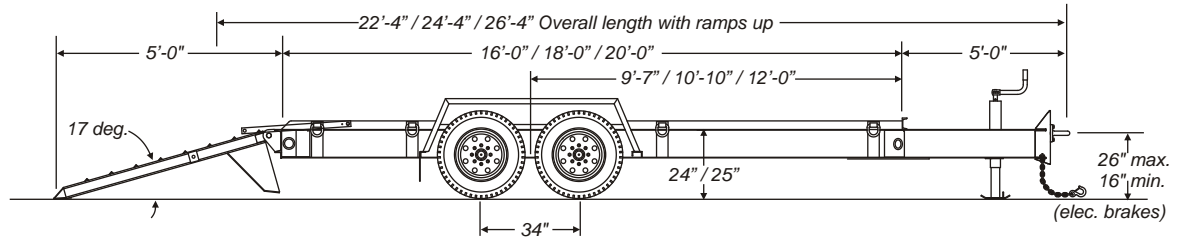

SPECIFICATIONS				
S=Standard O=Optional				
CAPACITY / DIMENSIONS	T-14DD	T-16DD	T-18DD	
Capacity Rating (lbs/kg)	14,000 / 6364	16,000 / 7273	18,000 / 8182	
Approx. Weight (16'-0" / 4877mm)(lbs/kg)	3,980 / 1805	4,420 / 2005	4,620 / 2096	
Approx. Weight (18'-0" / 5486mm)(lbs/kg)	4,230 / 1919	4,620 / 2096	4,820 / 2186	
Approx. Weight (20'-0" / 6096mm)(lbs/kg)	4,480 / 2032	4,820 / 2186	5,020 / 2277	
Deck Height (empty)(in/mm)	24 / 610	25 / 635	25 / 635	
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591	8-6 / 2591	
Load Width (in/mm)	84 / 2134	82 / 2083	82 / 2083	
<b>TONGUE</b>				
Tongue Length (ft-in/mm)	5-0 / 1524	5-0 / 1524	5-0 / 1524	
One-Piece Cold-Formed Tongue	S	S	S	
Adjustable Hitch	S	S	S	
3" Pintle Ring or 2-5/16" Ball Coupler	Specify	Specify	Specify	
3/8" High-Tensile Safety Chain x 40"	Grade 70	Grade 70	Grade 70	
Storage Tray	S	S	S	
Storage Tray Lid	O	O	O	
Bolt-on Drop-Leg Parking Jack	12K	12K	12K	
<b>FRAME / RAMPS</b>				
Main Beam	High-Tensile W10 x 12	High-Tensile W10 x 17	High-Tensile W10 x 17	
High-Tensile 3" Jr. I-beam Crossmembers	S	S	S	
Crossmembers 16" on-center	S	S	S	
Headboard (in/mm)	4 / 102	4 / 102	4 / 102	
2" Nominal White Oak Wood Deck	S	S	S	
Ramps (ft-in x in/mm)	6-0x19.25/1829x489	6-0x19.25/1829x489	6-0x19.25/1829x489	
Load Angle (degrees)	17	17	17	
Spring-Assist Ramps	S	S	S	
Adjustable Ramps	S	S	S	
Solid Bar Ramp Hold-ups	S	S	S	
Tie-Downs	Forged D-Rings	Forged D-Rings	Forged D-Rings	
Number of Tie-Downs (Total / Side)	8 / 4	8 / 4	8 / 4	
<b>SUSPENSION / TIRES</b>				
Dexter Torflex® Rubber-Ride Axles w/5-Year Warranty	S	S	S	
Axle Capacity (each) (lbs/kg)	7,200 / 3266	8,000 / 3629	10,000 / 4536	
Hubs	E-Z Lube®	E-Z Lube®	Oil Bath	
Electric Brakes	S	S	S	
Brake Size (in/mm)	12.25x2.5 / 311x64	12.25x3.38 / 311x86	12.25x3.38 / 311x86	
Battery Break-Away Kit w/ Tow Charger	S	S	S	
Wheels (in/mm)	17.5x6.75 / 445x171	17.5x6.75 / 445x171	17.5x6.75 / 445x171	
Wheel Bolt Pattern	8-bolt	8-bolt	8-bolt	
Tires / Load Range Rating	215/75R x 17.5 / H	215/75R x 17.5 / H	215/75R x 17.5 / H	
Poly Mud Flaps	S	S	S	
<b>WIRING / FINISH</b>				
Weather Resistant Sealed Wiring	S	S	S	
Weather Resistant Shock-Mounted Lights	S	S	S	
LED Lights	S	S	S	
6-pole Round or 7-pole RV Electrical Plug	Specify	Specify	Specify	
Registration Holder	S	S	S	
Rust Inhibiting Primer	S	S	S	
Durable, Rust Resistant Top Coat	S	S	S	
Durable, Die-Cut UV Resistant Vinyl Decals	S	S	S	
Follow local and Federal D.O.T. laws, including Federal Motor Carrier Safety Regulations §392.9, §393.100 and §393.102, and stay within GVWR restrictions.				
<b>OPTIONS</b>				
3 ft. Beavertail Carlisle brake controller (call for details) Electric winch w/60 ft. cable Lockable storage tray lid Full width mesh top ramp	Extra deck length Gooseneck (w/2-5/16" coupler) Gooseneck (w/inverted mini-fifth wheel) Bucket stop Spare Tire Mount / Spare Tire & Wheel	2 chock blocks and holder 25K two-speed jack Pallet fork holders (16 ft. or longer deck only) Special color (no metallic)		

We manufacture a complete line of trailers in capacities from 2000 lbs. to 120,000 lbs. Listed weights are approximate. Trailer weights can vary due to options installed. All dimensions are approximate. See VIN tag for actual GVWR. Check our website or see your authorized dealer for more information. Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer.

Towmaster, Inc., 61381 US Hwy 12, Litchfield, MN 55355  
Toll free: 800-462-4517 phone: 320-693-7900 fax: 320-693-7921  
www.towmaster.com  
Employee Owned, Employee Pride, U.S.A. Made!  
U.S.A. DESIGNED AND BUILT

Photos may not show most recent changes to models.