

CONTRAIL[®]

by **TOWMASTER**

MODELS:
C-10LS
C-12LS
C-14LS

The Standard for the Road Ahead!



Some equipment shown may be optional



Wood topped beavertail comes standard on the Contrail[®] Landscape Special.



Equipped standard with our patented Auto-Latch[®] ramp hold-ups.



Stake pockets are included for tying down loads or adding sides.

Description:

The Contrail[®] "LS" or Landscape Special trailer features a 5-ft. wood-topped beavertail and 8 ft. wide deck. This model is designed for bigger sized small equipment that doesn't require the heavier weight rating of our large trailers. Dexter Torflex axles give the Contrail[®] "LS" a predictable, smooth ride. Patented Auto-Latch[®] ramp hold-ups are standard and stake pockets provide a secure place for securing equipment.

Quick Specs:

- 35" / 36" deck heights (empty)
- 8'-0" deck width
- 14'-18' deck (model specific)
- 5' Wood-topped beavertail
- Stake pockets
- Electric brakes
- Torflex[®] axles
- 2" nominal white oak deck
- Auto-Latch[®] Ramps




Towmaster, Inc.

800-462-4517

Fax: 320-693-7921

Your authorized Towmaster[®] dealer.

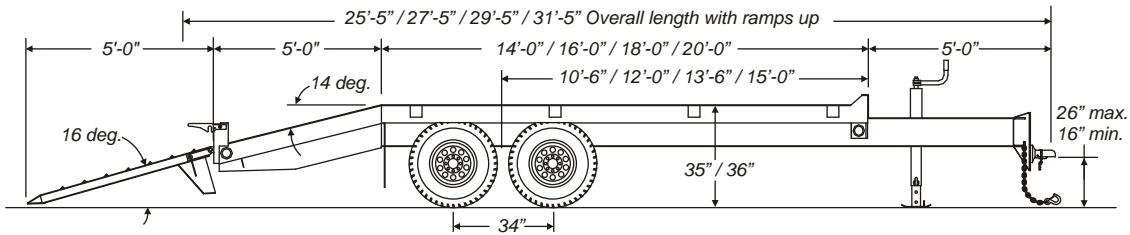

SPECIFICATIONS				
S=Standard O=Optional				
CAPACITY / DIMENSIONS	C-10LS	C-12LS	C-14LS	
Capacity Rating (lbs/kg)	10,000 / 4534	12,000 / 5443	14,000 / 6350	
Approx. Weight (14'-0" / 4267mm)(lbs/kg)	4,020 / 1823	4,100 / 1860	N/A	
Approx. Weight (16'-0" / 4877mm)(lbs/kg)	4,220 / 1914	4,300 / 1950	4,350 / 1973	
Approx. Weight (18'-0" / 5486mm)(lbs/kg)	N/A	N/A	4,550 / 2061	
Deck Height (empty)(lbs/kg)	35 / 889	36 / 914	36 / 914	
Deck Width (ft-in/mm)	8-0 / 2438	8-0 / 2438	8-0 / 2438	
TONGUE				
Tongue Length (ft-in/mm)	5-0 / 1524	5-0 / 1524	5-0 / 1524	
One-Piece Cold-Formed Tongue	S	S	S	
Adjustable Hitch	S	S	S	
3" Pintle Ring or 2-5/16" Ball Coupler	Specify	Specify	Specify	
3/8" High-Tensile Safety Chain x 40"	Grade 43	Grade 43	Grade 43	
Storage Tray	S	S	S	
Storage Tray Lid	O	O	O	
Bolt-on Drop-Leg Parking Jack	12K	12K	12K	
FRAME / RAMPS				
Main Beam	W10 x 12 High-Tensile	W10 x 12 High-Tensile	W10 x 12 High-Tensile	
3" Channel Crossmembers	S	S	S	
Crossmembers 18"-24" on-center	S	S	S	
Headboard Height (in/mm)	3.5 / 89	3.5 / 89	3.5 / 89	
Side Rails-channel (in/mm)	6 / 152	6 / 152	6 / 152	
Beavertail (ft-in/mm)	5-0 / 1524	5-0 / 1524	5-0 / 1524	
Wood Beavertail	S	S	S	
2" Nominal White Oak Wood Deck	S	S	S	
Ladder-Style Ramps/Size (ft-in x in/mm)	5-0x18/1524x470	5-0x18/1524x470	5-0x18/1524x470	
Load Angle (degrees)	16	16	16	
Adjustable Ramps	S	S	S	
Spring-Assist Ramps	O	O	S	
Patented Auto-Latch® Hold-ups	S	S	S	
Tie Downs	Stake Pocket	Stake Pocket	Stake Pocket	
Number of Tie-Downs (Total / Side)	8 / 4	8 / 4	8 / 4	
SUSPENSION / TIRES				
Dexter Torflex® Rubber-Ride Axles w/5-Year Warranty	S	S	S	
Axle Capacity (each) (lbs/kg)	6,000 / 2722	6,000 / 2722	7,000 / 3175	
Hubs	Standard Lube	Standard Lube	Standard Lube	
Electric Brakes	S	S	S	
Brake Size (in/mm)	12x2 / 305x51	12x2 / 305x51	12x2 / 305x51	
Battery Break-Away Kit	S	S	S	
Tow Charger	O	O	O	
Wheels (in/mm)	15x6 / 381x152	16x6 / 406x152	16x6 / 406x152	
Wheel Bolt Pattern	6-bolt	6-bolt	8-bolt	
Tires / Load Range Rating	ST225/75R x 15 / D	235/85R x 16 / E	235/85R x 16 / E	
Poly Mud Flaps	S	S	S	
WIRING / FINISH				
Weather Resistant Sealed Wiring	S	S	S	
Weather Resistant Shock-Mounted Lights	S	S	S	
Incandescent Type Lights	S	S	S	
6-pole Round or 7-pole RV Electrical Plug	Specify	Specify	Specify	
Registration Holder	S	S	S	
Rust Inhibiting Primer	S	S	S	
Durable, Rust Resistant Top Coat	S	S	S	
Durable, Die-Cut UV Resistant Vinyl Decals	S	S	S	
Follow local and Federal D.O.T. laws, including Federal Motor Carrier Safety Regulations §392.9, §393.100 and §393.102, and stay within GVWR restrictions.				
OPTIONS				
E-Z Lube hubs Lockable storage tray lid Spring-Assist ramps Gooseneck	Full width ramps with mesh top Wood top ramps Additional tie-downs LED lights	Chock block holders Bucket stop		

We manufacture a complete line of trailers in capacities from 2000 lbs. to 120,000 lbs. Listed weights are approximate. Trailer weights can vary due to options installed. All dimensions are approximate. See VIN tag for actual GVWR. Check our website or see your authorized dealer for more information. Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer.

Towmaster, Inc., 61381 US Hwy 12, Litchfield, MN 55355
Toll free: 800-462-4517 phone: 320-693-7900 fax: 320-693-7921
www.towmaster.com
Employee Owned, Employee Pride, U.S.A. Made!
U.S.A. DESIGNED AND BUILT

Photos may not show most recent changes to models.