

# TOWMASTER<sup>®</sup> TRAILERS

MODELS:  
T-20, T-20LP  
T-24, T-24LP

The Standard for the Road Ahead!



Some equipment shown may be optional



"LP" (Low-Profile) models feature wood topped ramps and beavertail.



Two-way spring-assist ramps are standard on all Towmaster<sup>®</sup> deck-over models.



A wood protector is standard on the T-20 and T-24 models. This protects the edge of the wood deck from wear.

## Description:

The premium line of Towmaster<sup>®</sup> deck-over trailers has proven to offer durability, longevity and style that other brands try to emulate. Our build quality and design creates a trailer that is easy to own and easy to maintain. The standard T-20 and T-24 include a self-cleaning, 5-foot angle iron beavertail. The T-20LP and T-24LP feature a lower deck height and a wood-topped 6-foot beavertail with a lower angle incline. Two-way spring-assist ramps are standard on all Towmaster<sup>®</sup> deck-over models.

## Quick Specs:

- 36" / 34" / 35" deck height (empty)
- 8'-6" deck width
- 20'-0" deck length
- Electric brakes (air option)
- Hutchens<sup>®</sup> suspension
- Adjustable hitch
- Two-way spring-assist ramps
- LED lights and sealed wiring




Towmaster, Inc.

800-462-4517

Fax: 320-693-7921

Your authorized Towmaster<sup>®</sup> dealer.

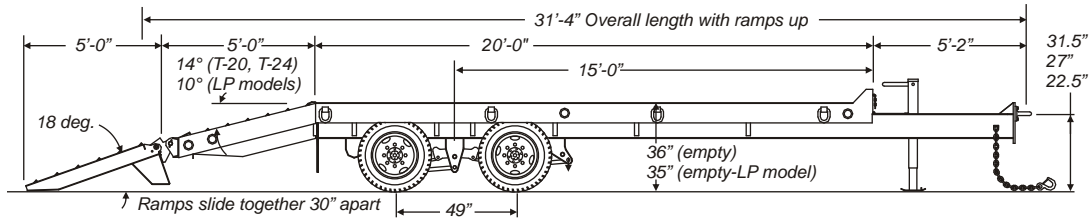

### SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	T-20	T-20LP	T-24	T-24LP
Capacity Rating (lbs/kg)	20,000 / 9072	20,000 / 9072	24,000 / 10,866	24,000 / 10,866
Approx. Weight (lbs/kg)	5,990 / 2717	5,990 / 2717	6,830 / 3098	6,880 / 3121
Deck Height (empty) (in/mm)	36 / 914	34 / 864	36 / 914	35 / 889
Deck Length (ft-in/mm)	20-0 / 6096	20-0 / 6096	20-0 / 6096	20-0 / 6096
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591	8-6 / 2591	8-6 / 2591
Overall Length (ft-in/mm)	31-4 / 9550	31-4 / 9550	31-4 / 9550	31-4 / 9550
<b>TONGUE</b>				
Tongue Length (ft-in/mm)	5-2 / 1575	5-2 / 1575	5-2 / 1575	5-2 / 1575
One-Piece Cold-Formed Tongue	S	S	S	S
Adjustable Hitch	S	S	S	S
3" Pintle Ring	S	S	S	S
High-Tensile Safety Chain (size - in)	3/8 x 40, Grade 70	3/8 x 40, Grade 70	1/2 x 40, Grade 70	1/2 x 40, Grade 70
Storage Tray	S	S	S	S
Lockable Storage Tray Lid	S	S	S	S
12K Bolt-on Drop-Leg Parking Jack	S	12K	12K	12K
25K Bolt-on Two-Speed Parking Jack	O	O	O	O
<b>FRAME / RAMPS</b>				
Main Beam	W10 x 17 Grade 50	W8 x 21 Grade 50	W10 x 17 Grade 50	W8 x 21 Grade 50
High-Tensile 3" Jr. I-beam Crossmembers	S	S	S	S
Crossmembers 16" on-center	S	S	S	S
Headboard (in/mm)	5.5 / 140	5.5 / 140	5.5 / 140	5.5 / 140
Channel Side Rails (in/mm)	8 / 203	8 / 203	8 / 203	8 / 203
Oak Wood Deck	S	S	S	S
Wood Protectors	S	N/A	S	N/A
Tie Downs	Forged D-rings	Forged D-rings	Forged D-rings	Forged D-rings
Number of Tie-Downs (Total / Side)	8 / 4	8 / 4	8 / 4	8 / 4
Beavertail (ft-in / mm) (angle-degrees)	5-0 / 1524 (14)	6-0 / 1829 (10)	5-0 / 1524 (14)	6-0 / 1829 (10)
Wood Top Beavertail	O	S	O	S
Ramps (ft-in x in/mm)	5-0 x 21 / 1524 x 533	6-0 x 21 / 1829 x 533	5-0 x 21 / 1524 x 533	6-0 x 21 / 1829 x 533
Wood Top Ramps	O	S	O	S
Two-Way Spring Assist	S	S	S	S
<b>SUSPENSION / TIRES</b>				
Hutchens Spring Suspension	S	S	S	S
Dexter Axles (number of axles)	S (2)	S (2)	S (2)	S (2)
Axle Capacity (each) (lbs/kg)	10,000 / 2721	12,000 / 2721	10,000 / 2721	12,000 / 2721
Axle Location from Front of Deck (% ratio)	75:25	75:25	75:25	75:25
Oil Bath Hubs	S	S	S	S
Electric Brakes	S	S	S	S
Air Brakes	O	O	O	O
Brake Size (in/mm)	12.25x4 / 311x102	12.25x5 / 311x127	12.25x5 / 311x127	12.25x5 / 311x127
Budd-type Wheels (in/mm)	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152
Wheel Bolt Pattern	8-bolt	8-bolt	8-bolt	8-bolt
Tires / Load Range Rating	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E
Poly Mud Flaps	S	S	S	S
<b>WIRING / FINISH</b>				
Weather Resistant Sealed Wiring	S	S	S	S
Weather Resistant Lights	S	S	S	S
LED Lights	S	S	S	S
Registration Holder	S	S	S	S
Rust Inhibiting Primer	S	S	S	S
Durable, Rust Resistant Top Coat	S	S	S	S
Durable, Die-Cut UV Resistant Vinyl Decals	S	S	S	S
Subject to F.E.T.	N	N	Y	Y

Follow local and Federal D.O.T. laws, including Federal Motor Carrier Safety Regulations §392.9, §393.100 and §393.102, and stay within GVWR restrictions.

#### OPTIONS

Additional deck length	Gooseneck	Winch and cable
Additional tie downs	Special color (no metallic)	Angelim Pedra wood deck
8'-0" overall width	Spare tire/rim	Dual parking jacks
6'-0" beavertail w/6'-0" ramps (T-20/T-24)	Spare tire carrier	25K two-speed parking jack
Double-break beavertail (not available on "LP" models)	Stake pockets and rub rail	

We manufacture a complete line of trailers in capacities from 2000 lbs. to 120,000 lbs. Listed weights are approximate. Trailer weights can vary due to options installed. All dimensions are approximate. See VIN tag for actual GVWR. Check our website or see your authorized dealer for more information. Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer.

Towmaster, Inc., 61381 US Hwy 12, Litchfield, MN 55355  
Toll free: 800-462-4517 phone: 320-693-7900 fax: 320-693-7921  
www.towmaster.com  
Employee Owned, Employee Pride, U.S.A. Made!  
U.S.A. DESIGNED AND BUILT

Photos may not show most recent changes to models.