

TOWMASTER[®] TRAILERS

MODELS:
T-30
T-40
T-40LP

The Standard for the Road Ahead!

Some equipment shown may be optional



"LP" (Low-Profile) models feature a 10-inch beam, steel over the wheels and a 12-degree beavertail.



Two-way spring-assist ramps are standard on all Towmaster[®] deck-over models.



A wood protector is standard on the T-30 and T-40 models. This protects the edge of the wood deck from wear.

Description:

These premium Towmaster[®] deck-over trailers are built more durable and more stylish to provide a great looking trailer that will last you a long time. The T-30 and T-40 are great for hauling heavy equipment of all types. If you need a lower profile trailer, the T-40LP gives you an extra 2-inches and lower loading angle. To prevent slipping, Towmaster[®] uses shorter steel plating over the wheels on the "LP". Two-way spring-assist ramps and wood protectors are standard on all three models.

Quick Specs:


- 36" / 34" deck height (empty)
- 8'-6" deck width
- 20'-0" deck length
- Elec. brakes (T-30), Air (T-40, T-40LP)
- Hutchens[®] suspension
- Adjustable hitch
- Two-way spring-assist ramps
- LED lights and sealed wiring

Towmaster, Inc.

800-462-4517

Fax: 320-693-7921

Your authorized Towmaster[®] dealer.

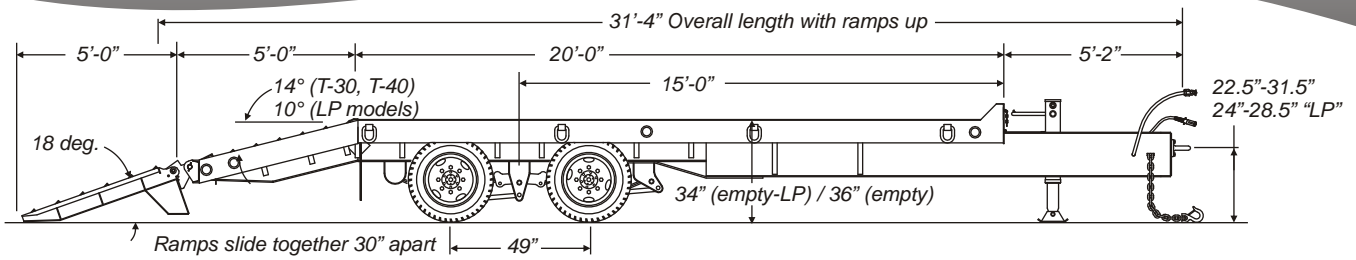

SPECIFICATIONS				
S=Standard O=Optional				
CAPACITY / DIMENSIONS	T-30	T-40	T-40LP	
Capacity Rating (lbs/kg)	30,000 / 13,608	40,000 / 18,144	40,000 / 18,144	
Approx. Weight (lbs/kg)	8,600 / 3901	8,670 / 3933	8,670 / 3933	
Deck Height (empty)(in/mm)	36 / 914	36 / 914	34 / 864	
Deck Length (ft-in/mm)	20-0 / 6096	20-0 / 6096	20-0 / 6096	
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591	8-6 / 2591	
Overall Length (ft-in/mm)	31-4 / 9550	31-4 / 9550	31-4 / 9550	
TONGUE				
Tongue Length (ft-in/mm)	5-2 / 1575	5-2 / 1575	5-2 / 1575	
One-Piece Cold-Formed Tongue	S	S	S	
Adjustable Hitch	S	S	S	
3" Pintle Ring	S	S	S	
High-Tensile Safety Chain (size – in)	1/2 x 40, Grade 70	1/2 x 40, Grade 80	1/2 x 40, Grade 80	
Storage Tray	S	S	S	
Lockable Storage Tray Lid	S	S	S	
25K Bolt-on Two-Speed Parking Jack	S	S	S	
FRAME / RAMPS				
Main Beam	W10 x 26 Grade 50	W16 x 26 Grade 50	W10 x 26 Grade 50	
High-Tensile 3" Jr. I-beam Crossmembers	S	S	S	
Crossmembers 16" on-center	S	S	S	
Headboard (in/mm)	5.5 / 140	5.5 / 140	5.5 / 140	
Channel Side Rails (in/mm)	8 / 203	8 / 203	8 / 203	
Oak Wood Deck	S	S	S	
Wood Protectors	S	S	S	
Tie Downs	Forged D-rings	Forged D-rings	Forged D-rings	
Number of Tie-Downs (Total / Side)	8 / 4	8 / 4	8 / 4	
Beavertail (ft-in / mm) (angle-degrees)	5-0 / 1524 (14)	5-0 / 1524 (14)	5-0 / 1524 (12)	
Ramps (ft-in x in/mm)	5-0 x 21 / 1524 x 533	5-0 x 21 / 1524 x 533	5-0 x 21 / 1524 x 533	
Two-Way Spring Assist	S	S	S	
SUSPENSION / TIRES				
Hutchens Spring Suspension	S	S	S	
Dexter Axles (number of axles)	S (2)	S (2)	S (2)	
Axle Capacity (lbs/kg)	15,000 / 6804	22,500 / 10,206	22,500 / 10,206	
Axle Location from Front of Deck (% ratio)	75:25	75:25	75:25	
Oil Bath Hubs	S	S	S	
Electric Brakes	S	N/A	N/A	
Air Brakes	N/A	S	S	
Brake Size (in/mm)	12.25x5 / 311x127	12.25x7.5 / 311x191	12.25x7.5 / 311x191	
Budd-type Wheels (in/mm)	17.5x6.75 / 445x171	17.5x6.75 / 445x171	17.5x6.75 / 445x171	
Wheels Hub Piloted	S	S	S	
Wheel Bolt Pattern	8-bolt	8-bolt	8-bolt	
Tires / Load Range Rating	215/75R x 17.5 / H	215/75R x 17.5 / H	215/75R x 17.5 / H	
Poly Mud Flaps	S	S	S	
WIRING / FINISH				
Weather Resistant Sealed Wiring	S	S	S	
Weather Resistant Lights	S	S	S	
LED Lights	S	S	S	
Registration Holder	S	S	S	
Rust Inhibiting Primer	S	S	S	
Durable, Rust Resistant Top Coat	S	S	S	
Durable, Die-Cut UV Resistant Vinyl Decals	S	S	S	
Subject to F.E.T.	Y	Y	Y	
Follow local and Federal D.O.T. laws, including Federal Motor Carrier Safety Regulations §392.9, §393.100 and §393.102, and stay within GVWR restrictions.				
OPTIONS				
Additional deck length	Gooseneck	Angelim Pedra wood deck		
Additional tie downs	Special color (no metallic)	Dual parking jacks		
8'-0" overall width	Spare tire bracket/Spare tire and wheel	Air ride suspension		
6'-0" beavertail w/6'-0" ramps	Stake pockets and rub rail			
Double-break beavertail (not on "LP")	Winch and cable			

We manufacture a complete line of trailers in capacities from 2000 lbs. to 120,000 lbs. Listed weights are approximate. Trailer weights can vary due to options installed. All dimensions are approximate. See VIN tag for actual GVWR. Check our website or see your authorized dealer for more information. Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer.

Towmaster, Inc., 61381 US Hwy 12, Litchfield, MN 55355
Toll free: 800-462-4517 phone: 320-693-7900 fax: 320-693-7921
www.towmaster.com
Employee Owned, Employee Pride, U.S.A. Made!
U.S.A. DESIGNED AND BUILT

Photos may not show most recent changes to models.