

TOWMASTER[®] TRAILERS

MODELS:
T-50
T-50LP

The Standard for the Road Ahead!

Some equipment shown may be optional



"LP" (Low-Profile) models feature a 10-inch beam, steel over the wheels and a 12-degree beavertail.



Optional air-lift front axle is available on the T-50.



To protect the edge of the deck wood from wear, a wood protector is standard on the T-50 and T-50LP.

Description:

The Towmaster[®] T-50 and T-50LP are built to haul heavy equipment with features that make them easy to maintain and last a long time. They feature a triple axle, two-way spring-assist ramps, Hutchens suspension and sealed wiring. The standard T-50 is great for more open areas while the Low-Profile model is designed for areas with lower bridges. It gives you an extra 2-inches of clearance and a lower loading angle. To prevent slipping, Towmaster[®] uses shorter steel plating over the wheels on the "LP".

Quick Specs:


- 36" / 34" deck height (empty)
- 8'-6" deck width
- 24'-0" deck length
- Air brakes
- Hutchens[®] suspension
- Adjustable hitch
- Two-way spring-assist ramps
- LED lights and sealed wiring

Towmaster, Inc.

800-462-4517

Fax: 320-693-7921

Your authorized Towmaster[®] dealer.

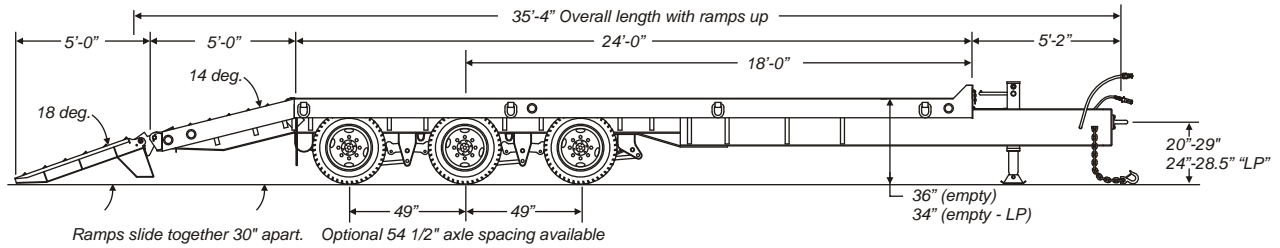

SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	T-50	T-50LP		
	Capacity Rating (lbs/kg)	50,000 / 22,680	50,000 / 22,680	
Approx. Weight (lbs/kg)	11,100 / 5035	11,000 / 4990		
Deck Height (empty)(in/mm)	36 / 914	34 / 864		
Deck Length (ft-in/mm)	24-0 / 7315	24-0 / 7315		
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591		
Overall Length (ft-in/mm)	35-4 / 10,770	35-4 / 10,770		
TONGUE				
Tongue Length (ft-in/mm)	5-2 / 1575	5-2 / 1575		
One-Piece Cold-Formed Tongue	S	S		
Adjustable Hitch	S	S		
3" Pintle Ring	S	S		
High-Tensile Safety Chain (size - in)	5/8 x 40, Grade 80	5/8 x 40, Grade 80		
Storage Tray	S	S		
Lockable Storage Tray Lid	S	S		
25K Bolt-on Two-Speed Parking Jack	S	S		
FRAME / RAMPS				
Main Beam	W16 x 26 Grade 50	W10 x 26 Grade 50		
High-Tensile 3" Jr. I-beam Crossmembers	S	S		
Crossmembers 16" on-center	S	S		
Headboard (in/mm)	5.5 / 140	5.5 / 140		
Channel Side Rails (in/mm)	8 / 203	8 / 203		
Oak Wood Deck	S	S		
Wood Protectors	S	S		
Tie Downs	Forged D-rings	Forged D-rings		
Number of Tie-Downs (Total / Side)	8 / 4	8 / 4		
Beavertail (ft-in / mm) (angle-degrees)	5-0 / 1524 (14)	5-0 / 1524 (12)		
Ramps (ft-in x in/mm)	5-0 x 21 / 1524 x 533	5-0 x 21 / 1524 x 533		
Two-Way Spring Assist	S	S		
SUSPENSION / TIRES				
Hutchens Spring Suspension	S	S		
Dexter Axles (number of axles)	S (3)	S (3)		
Axle Capacity (each) (lbs/kg)	22,500 / 10,206	22,500 / 10,206		
Axle Location from Front of Deck (% ratio)	75:25	75:25		
Oil Bath Hubs	S	S		
Air Brakes	S	S		
Brake Size (in/mm)	12.25x7.5 / 311x191	12.25x7.5 / 311x191		
Budd-type Wheels (in/mm)	17.5x6.75 / 445x171	17.5x6.75 / 445x171		
Wheels Hub Piloted	S	S		
Wheel Bolt Pattern	8-bolt	8-bolt		
Tires / Load Range Rating	215/75R x 17.5 / H	215/75R x 17.5 / H		
Poly Mud Flaps	S	S		
WIRING / FINISH				
Weather Resistant Sealed Wiring	S	S		
Weather Resistant Lights	S	S		
L.E.D. Lights	S	S		
Registration Holder	S	S		
Rust Inhibiting Primer	S	S		
Durable, Rust Resistant Top Coat	S	S		
Durable, Die-Cut UV Resistant Vinyl Decals	S	S		
Subject to F.E.T.	Y	Y		
Follow local and Federal D.O.T. laws, including Federal Motor Carrier Safety Regulations §392.9, §393.100 and §393.102, and stay within GVWR restrictions.				
OPTIONS				
Additional deck length Additional tie downs 8'-0" overall width 6'-0" beavertail w/6'-0" ramps Double-break beavertail (not on "LP")	Gooseneck Special color (no metallic) Spare tire and wheel Spare tire mount Stake pockets and rub rail	Winch and cable Angelim Pedra wood deck Dual parking jacks Air ride suspension Air-lift front axle		

We manufacture a complete line of trailers in capacities from 2000 lbs. to 120,000 lbs. Listed weights are approximate. Trailer weights can vary due to options installed. All dimensions are approximate. See VIN tag for actual GVWR. Check our website or see your authorized dealer for more information. Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer.

Towmaster, Inc., 61381 US Hwy 12, Litchfield, MN 55355
Toll free: 800-462-4517 phone: 320-693-7900 fax: 320-693-7921
www.towmaster.com
Employee Owned, Employee Pride, U.S.A. Made!
U.S.A. DESIGNED AND BUILT

Photos may not show most recent changes to models.